

ANNUBAR TEST VALVE ASSEMBLY

FEATURES

- Grooved end connection
- Inclusions;
 - Galvanised pipe
 - UL/FM approved butterfly valve
 - Triple duty or globe valve (as balance/ throttling) flow control and isolation of the system



OPTIONS

- Valves can be supplied separately.
- Can be installed vertically or horizontally


TECHNICAL DATA

- Code: FFS-ASSY-AN(size DN)
- Size Range: DN50 – 200
- Working Pressure: 1600 kPa

DIMENSIONS

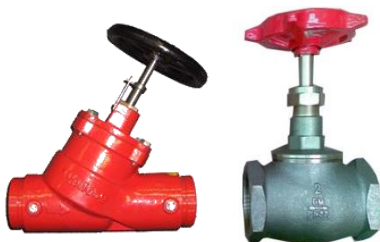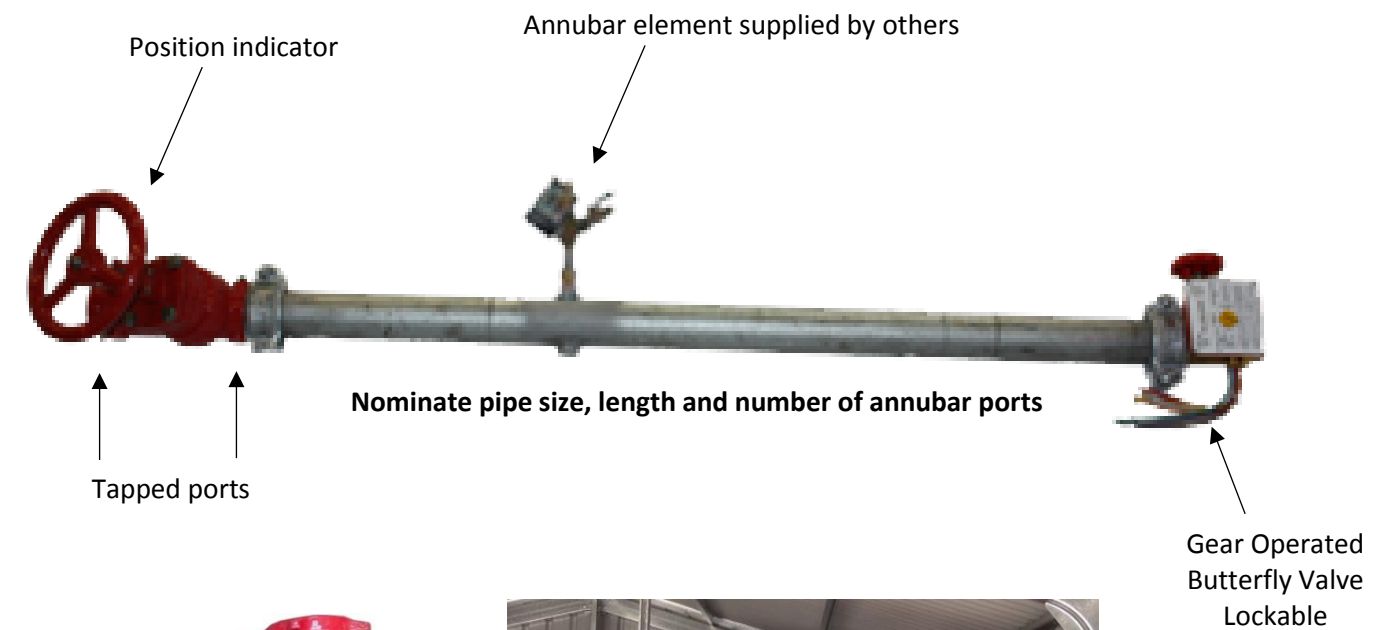

Triple Duty or Globe Valve

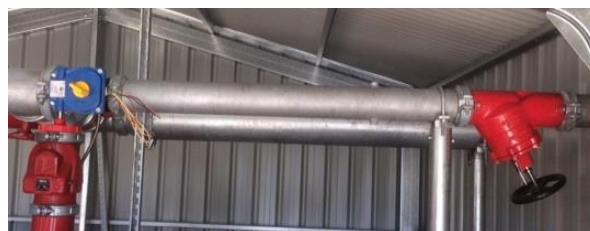

Installed Annubar Assembly
(Above)