

WEFLO LEVEL CONTROL VALVES

ROLL GROOVED CONNECTIONS

FEATURES

Line pressure driven - Independent operation
 Modulating hydraulic float control


- Unobstructed flow path
- Single moving part
- Super design featuring exceptionally low pressure losses at high flow rates
- Fusion bonded epoxy coated interior and exterior

External installation

- Easy access
- Less wear and tear

In-line serviceable

- Low maintenance cost
- Flexible design - Easy addition of features
- The operation time can be adjusted

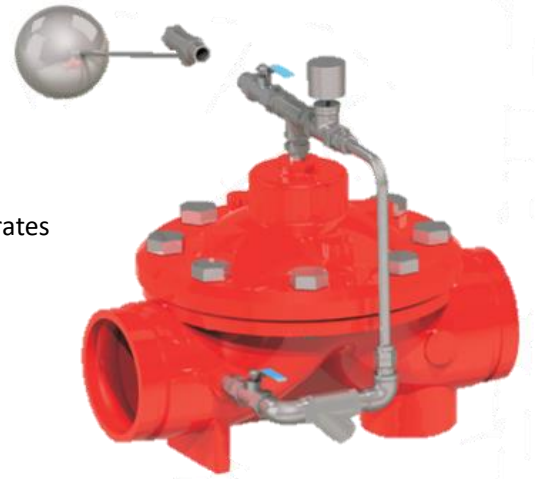

Model # 6901

TECHNICAL DATA

- Code: FFS-BF6901RG-(size) *Grooved x Grooved*
- Size Range: DN100 & DN150
- Grooves: To AWWA C606
- Working Pressure: PN16 (232 psi)

Part Name	Material
Body	Ductile Iron
Cover	Ductile Iron
Diaphragm	Rubber
Trim	SS316

DIMENSIONS

Size	L	H	A
DN100	356	270	230
DN150	436	290	265

