

FLO ROLL GROOVED END CAP

FEATURES

- Hot dipped galvanised finish
- UL listed and FM approved
- Grade 65-45-12 ASTM A536 ductile iron

OPTIONS

- Caps with eccentric BSP tapping also available

TECHNICAL DATA

- Code: FWG-60-(size OD) *Standard*
FWG-60-(size OD)T *Tapped*
- Size Range: DN25 –300
- Approved Working Pressure: 300psi

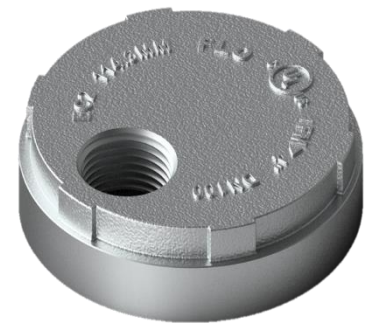
DIMENSIONS

- Standard

| PRODUCT CODE | DN SIZE (mm) | OD SIZE (mm) | L (mm) | Wt (kg) | Carton Qty |
|--------------|--------------|--------------|--------|---------|------------|
| FWG-60-34 | 25 | 33.7 | 26 | 0.08 | 100 |
| FWG-60-43 | 32 | 42.4 | 26 | 0.11 | 100 |
| FWG-60-48 | 40 | 48.3 | 26 | 0.14 | 100 |
| FWG-60-60 | 50 | 60.3 | 26 | 0.20 | 100 |
| FWG-60-73 | 65 | 73.0 | 26 | 0.26 | 75 |
| FWG-60-76 | 65 | 76.1 | 26 | 0.27 | 75 |
| FWG-60-88 | 80 | 88.9 | 26 | 0.48 | 50 |
| FWG-60-114 | 100 | 114.3 | 26 | 0.74 | 40 |
| FWG-60-141 | 125 | 141.3 | 26 | 1.00 | 30 |
| FWG-60-165 | 150 | 165.1 | 26 | 1.63 | 20 |
| FWG-60-168 | 150 | 163 | 26 | 1.95 | 20 |
| FWG-60-219 | 200 | 219.1 | 30 | 3.18 | 5 |
| FWG-60-273 | 250 | 273.0 | 30 | 5.25 | 5 |
| FWG-60-323 | 300 | 323.9 | 30 | 9.00 | 3 |

- Eccentric BSP tapping

| PRODUCT CODE | DN SIZE (mm) | OD SIZE (mm) | BSP Hole (mm) | Wt (kg) | Carton Qty |
|--------------|--------------|--------------|---------------|---------|------------|
| FWG-60-34T | 25 | 33.7 | 20 | | 100 |
| FWG-60-43T | 32 | 42.4 | 25 | | 100 |
| FWG-60-48T | 40 | 48.3 | 25 | | 100 |
| FWG-60-60T | 50 | 60.3 | 25 | 0.184 | 100 |
| FWG-60-76T | 65 | 76.1 | 25 | 0.294 | 75 |
| FWG-60-88T | 80 | 88.9 | 25 | 0.580 | 50 |
| FWG-60-114T | 100 | 114.3 | 25 | 0.940 | 40 |
| FWG-60-165T | 150 | 165.1 | 25 | 2.370 | 20 |
| FWG-60-219T | 200 | 219.1 | 25 | 4.980 | 5 |
| FWG-60-273T | 250 | 273.0 | 25 | | 5 |
| FWG-60-323T | 300 | 323.9 | 25 | | 3 |


Model # EC1

Model # EC2


Please refer manufacturer's installation guideline which can be found on our website or ask our team!