

FLO ROLL GROOVED STANDARD TEE

FEATURES

- Hot dipped galvanised or painted
- UL listed and FM approved
- Grade 65-45-12 ASTM A536 ductile iron

OPTIONS

- **Other sizes available on request.**

TECHNICAL DATA


- Code: FWG-20-(size OD)
- Size Range: DN25 – 50 and DN250 – 300
- Approved Working Press: 300 psi

DIMENSIONS

DN SIZE	OD (mm)	CE (mm)	Wt (kg)	Ctn Qty
25	33.4	58	0.4	50
32	42.4	70	0.7	50
40	48.3	70	0.9	50
50	60.3	83	1.3	30
250	273.0	229	31.0	1
300	323.9	254	40.0	1



Model # T1

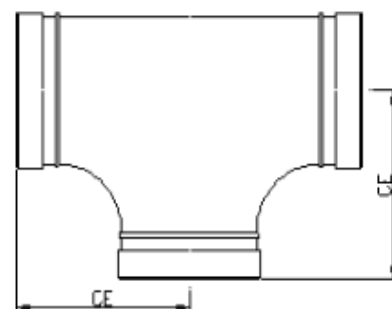

We also stock high pressure fittings.

Please refer manufacturer's installation guideline which can be found on our website or ask our team!